

HMD42/53 Humidity and Temperature Transmitters for Ducts in Commercial HVAC Applications



Features/Benefits

- Designed for building automation applications
- ± 3 %RH accuracy
- Full 0 ... 100 %RH measurement range
- $-20 \dots +60$ °C ($-4 \dots +140$ °F) operating range
- IP65 (NEMA 4) metal housing
- Excellent stability and high reliability
- Fully interchangeable Vaisala INTERCAP® Sensor
- Variety of analog signal outputs available

The duct mounted Vaisala INTERCAP® Humidity and Temperature Transmitters HMD42 and HMD53 are designed for building automation applications. They combine reliable operation with excellent stability, providing low cost of ownership to the user.

Flexibility in Humidity and Temperature Measurement

The HMD42/53 transmitters measure humidity with a ± 3 %RH accuracy and temperature with a ± 0.4 °C (± 0.72 °F) accuracy. They feature various selectable analog output signals and they can be powered by either AC or DC voltage.

Easy Maintenance

The HMD42/53 humidity transmitters use Vaisala INTERCAP® Sensor - the interchangeable capacitive humidity sensor. The transmitters require no recalibration if the sensor is changed. This means great savings in overall maintenance costs.

Reliable Performance in Harsh Environments

The duct mount HMD42/53 transmitters can be installed in various measurement environments due to the robust IP65 (NEMA4) rated metal enclosure, which protects the sensor from dust and splashes of water. The wide measurement temperature range from -20 °C to $+60$ °C ($-4 \dots +140$ °F) covers most HVAC applications.

Typical Applications

- Office buildings
- Retail spaces
- Governmental buildings
- Educational facilities
- Sport and event complexes
- Hotels and conference centers
- Airports
- Metro stations

Technical Data

Relative Humidity

Measurement range	0 ... 100 %RH	
Typical accuracy		
Temperature range	0 ... +40 °C (+32 ... +104 °F)	
0 ... 90 %RH	±3 %RH	
90 ... 100 %RH	±5 %RH	
Temperature range	-20 ... 0 °C, +40 ... +60 °C (-4 ... +32 °F, +104 ... +140 °F)	
0 ... 90 %RH	±5 %RH	
90 ... 100 %RH	±7 %RH	
Humidity sensor	Vaisala INTERCAP®	
Stability	±2 %RH / 2 years	
Response time at 20 °C (+68 °F), 90 % response	15 s	

Temperature

Measurement range	-20 ... +60 °C (-4 ... +140 °F)	
Output scale	-40 ... +60 °C (-40 ... +140 °F)	
Accuracy		
0 ... +40 °C (+32 ... +104 °F)	±0.4 °C (±0.72 °F)	
-20 ... 0 °C, +40 ... +60 °C (-4 ... +32 °F, +104 ... +140 °F)	±0.6 °C (±1.1 °F)	
Sensor	Pt1000 IEC 751 Class B	

General - HMD42

Supply voltage	10 ... 35 VDC ($R_L = 0$ ohm)	
	20 ... 35 VDC ($R_L = 500$ ohm)	
Output signal	4 ... 20 mA	

General - HMD53

Supply voltage range depends on the selected output signal		
	DC	AC
0 ... 1V	10 ... 35V	9 ... 24V
0 ... 5V	14 ... 35V	12 ... 24V
0 ... 10V	19 ... 35V	16 ... 24V
WITH OPTIONAL CURRENT MODULE		
0 ... 20 mA ($R_L = 0$ ohm)	10 ... 35V	11 ... 24V
**0 ... 20 mA ($R_L = 500$ ohm)	20 ... 35V	17 ... 24V
Power consumption @ 24VAC	12mA typical	

**Optional temperature scales are available on request.

General

Operating temperature range		
electronics	-5 ... +55 °C (+23 ... +131 °F)	
probe	-20 ... +60 °C (-4 ... +140 °F)	
Storage temperature range	-40 ... +60 °C (-40 ... +140 °F)	
Maximum flow speed	50 m/s	
Housing material		
probe	stainless steel	
electronics	cast aluminium	
Housing classification	IP65 (NEMA 4)	
Connections	screw terminal 0.5 ... 1.5 mm ²	
Cable thread-through bushing for 7 ... 10 mm (PG9) included	(18941HM)	
Complies with EMC standard EN61326 and EN55022		

Accessories


Armoured cable gland	10528HM
Current module (for HMD53)	18945HM

Spare Parts

Vaisala INTERCAP sensor, 1 piece	15778HM
Vaisala INTERCAP sensor, 10 pcs	INTERCAPSET-10PCS
Membrane filter	DRW010525
Sintered filter	HM46670SP

Dimensions

Dimensions in mm

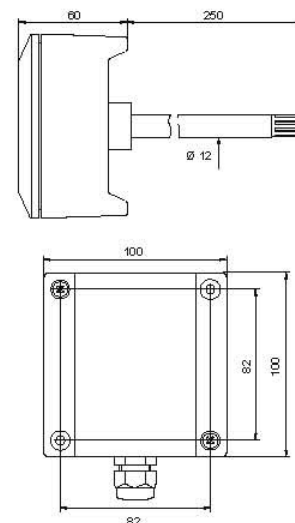

VAISALA

上海希萨测量技术有限公司
 电话: 021-52352301
 传真: 021-52352321
 邮箱: sales@seasy-instruments.com
 网址: www.seasy-instruments.com

Ref. B21140EN-A ©Vaisala 2011

This material is subject to copyright protection, with all copyrights retained by Vaisala and its individual partners. All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. The reproduction, transfer, distribution or storage of information contained in this brochure in any form without the prior written consent of Vaisala is strictly prohibited. All specifications — technical included — are subject to change without notice.

